

LAUNDRY EQUIPMENT CATALOGUE




Laundry
Solutions Australia

WELCOME

Since 1983, Laundry Solutions Australia (previously IPSO Laundry Solutions) has provided laundry equipment and accessories to Aged-care, Hospitality and other organisations.

From serving these industries for **28 years**, we have ascertained a deep understanding of our clients' business needs and therefore are able to tailor a suitable solution from planning of the laundry, through to the final installation.

This commitment extends to providing ongoing training and support for our products with a dedicated service team available **365 days a year**.

We are pleased to share with you our current range of laundry equipment and associated products. From washers and dryers, to accessories, and our innovative and environmentally friendly ozone products, we provide a total solution for any laundry facility.

We dedicate ourselves to providing the highest standard of products and services to our clients, and continue to strive to fulfill our mission statement:

'To reduce the carbon footprint and water consumption of your laundry.'

We hope that our company can partner with yours to achieve this goal.

Sven Klemme
Chief Executive Officer
Laundry Solutions Australia





SERVICE	4
INDUSTRIAL WASHERS	6
ENVIROSAVER	8
INDUSTRIAL DRYERS	10
INDUSTRIAL IRONERS	12
COMMERCIAL EQUIPMENT	14
OXYFRESH	16
COLLECTION TROLLEYS	18
PROCESS AND DISTRIBUTION TROLLEYS	20
CLOTHING IDENTIFICATION	22
WASHER SPECIFICATIONS	24
DRYER SPECIFICATIONS	26

COMPLETE CARE

Given the high demands of operating a business, the last thing that you need to be worrying about is the efficient operation of your laundry equipment.

Complete Care provides you with the assurance that the equipment that is so vital to the effective running of your laundry is well maintained, thus maximising its productivity and lifespan whilst saving you money.

Laundry equipment is no different to a motor vehicle, in that it requires regular servicing to ensure its continued efficient operation and protection of your investment. The concept of planned maintenance ensures that not only is your laundry equipment well looked after, it also provides you with ability to plan the servicing and thus minimising down-time and service costs.

Complete Care provides you with a guarantee that should your laundry equipment require servicing at a time between the planned maintenances then we will waive the service callout fee. This gives you the peace of mind that your servicing costs are what you expect them to be. Complete Care also provides you with an extended warranty on any new Laundry Solutions Australia equipment therefore saving you more and ensuring peace of mind.

- Same Day Service Call Response
- On-site Service availability 365 days per year
- Extends the new equipment warranty
- Guaranteed "No Call-out Fee" between maintenances
- Increases equipment lifespan
- Free On-Site Laundry Consulting
- Minimises "surprise" service calls
- Fully managed and documented maintenance program
- Keeps service costs to an absolute minimum
- Increases laundry productivity
- Equipment Condition Report Provided on each visit
- Free Programming to *AS4146-2000* Standard
- Meets *AS4146-2000* preventative maintenance requirements

YOU HAVE INVESTED IN US..
SO WE HAVE INVESTED IN YOU..
THE BEST LAUNDRY SERVICE TEAM
BAR NONE!



**OUR TEAM SERVICING YOU
365 DAYS A YEAR**

PH 1800 243 477

FAX 1300 728 108

WWW.YOURLAUNDRY.COM.AU

WF SLUICE WASHER



*WF 185 shown

- Specially designed sluce drum for facilities requiring cleaning of heavily soiled linen
- Rigid-mount medium spin
- Fully-programmable microprocessor
- Meets Australian Standard AS4146-2000 for disinfection in laundry
- User-friendly control panel
- Mounting base available to comply with OH&S requirements
- Soap dispensing ready

MODEL	CAPACITY (KG)	VOLUME DRUM (L)	HEATING*	NET WEIGHT (KG)	'ENVIROSAVER' OZONE COMPATIBLE	'WATERSAVER' COMPATIBLE	DIMENSIONS HxWxD (MM)
WF 65	6.5	65	E/S/B	174	Y	Y	1014 x 660 x 670
WF 75	7.3	73	E/S/B	181	Y	Y	1014 x 660 x 670
WF 100	9.5	95	E/S/B	200	Y	Y	1014 x 660 x 770
WF 135	13.5	132	E/S/B	280	Y	Y	1175 x 780 x 760
WF 150	14.5	145	E/S/B	306	Y	Y	1175 x 780 x 760
WF 165	16.5	165	E/S/B	298	Y	Y	1175 x 780 x 860
WF 185	18.1	181	E/S/B	307	Y	Y	1175 x 780 x 860
WF 235	23.4	234	E/S/B	383	Y	Y	1351 x 860 x 927
WF 305	30.5	304	E/S/B	534	Y	Y	1386 x 990 x 1055
WF 400	40	400	E/S/B	560	Y	Y	1412 x 990 x 1055

*Electric (E) / Steam (S) / Boiler fed (B)

HC FREESTANDING (HIGH-SPIN)



*HC 75 (with coin-op) shown

- Soft-mount suspension for heavy items and towelling
- Does not need to be anchored to floor
- Fully-programmable microprocessor
- Meets Australian Standard AS4146-2000 for disinfection in laundry
- User-friendly control panel
- Mounting base available to comply with OH&S requirements

MODEL	CAPACITY (KG)	VOLUME DRUM (L)	HEATING*	NET WEIGHT (KG)	'ENVIROSAVER' OZONE COMPATIBLE	'WATERSAVER' COMPATIBLE	DIMENSIONS HxWxD (MM)
HC 60	5.5	55	E/S/B	184	Y	Y	1038 x 660 x 622
HC 65	6.5	65	E/S/B	207	Y	Y	1038 x 660 x 727
HC 75	7.3	73	E/S/B	211	Y	Y	1038 x 660 x 727
HC 100	9.5	95	E/S/B	236	Y	Y	1038 x 660 x 827
HC 135	13.2	132	E/S/B	325	Y	Y	1202 x 780x x813
HC 165	16.5	165	E/S/B	358	Y	Y	1202 x 780 x 916

*Electric (E) / Steam (S) / Boiler fed (B)

HF SOFT-MOUNT (HIGH-SPIN)



- Ideal for heavy items and towelling
- Ranging from 15kg to 90kg capacity
- Fully-programmable microprocessor
- Meets Australian Standard *AS4146-2000* for disinfection in laundry
- User-friendly control panel
- Mounting base available to comply with OH&S requirements

*HF 234 shown

MODEL	CAPACITY (KG)	VOLUME DRUM (L)	HEATING*	NET WEIGHT (KG)	'ENVIROSAVER' OZONE COMPATIBLE	'WATERSAVER' COMPATIBLE	DIMENSIONS HxWxD (MM)
HF 150	14.5	145	E/S/B	363	Y	Y	1348 x 780 x 753
HF 185	18.1	181	E/S/B	391	Y	Y	1348 x 780 x 853
HF 234	23.4	234	E/S/B	534	Y	Y	1500 x 900 x 985
HF 304	30.4	304	E/S/B	731	Y	Y	1530 x 1060 x 985
HF 455	45.5	455	E/S/B	1520	Y	Y	1920 x 1200 x 1335
HF 575	57.5	575	E/S/B	1645	Y	Y	1920 x 1200 x 1500
HF 730	73	730	E/S/B	2100	Y	Y	2100 x 1300 x 1620
HF 900	90	900	E/S/B	2700	Y	Y	2100 x 1300 x 1800

*Electric (E) / Steam (S) / Boiler fed (B)

HM BARRIER WASHER



- Reduces risk of Hospital-Acquired-Infection (HAI) in hospital theatre linen laundries
- Built-in wall installation for optimal sanitisation
- Fully-programmable microprocessor
- Meets Australian Standard *AS4146-2000* for disinfection in laundry
- User-friendly control panel

*HM 330 shown

MODEL	CAPACITY (KG)	VOLUME DRUM (L)	HEATING*	NET WEIGHT (KG)	'ENVIROSAVER' OZONE COMPATIBLE	'WATERSAVER' COMPATIBLE	DIMENSIONS HxWxD (MM)
HM 160	16	158	E/S	429	Y	Y	1385 x 980 x 910
HM 220	22	220	E/S	450	Y	Y	1385 x 1180 x 910
HM 270	27	268	E/S/G	880	Y	Y	1665 x 1172 x 1053
HM 330	33	329	E/S/G	1060	Y	Y	1665 x 1292 x 1053
HM 490	49	489	E/S/G	1300	Y	Y	1665 x 1612 x 1053
HM 670	67	667	E/S/G	1570	Y	Y	1690 x 1965 x 1053
HM 900	90	900	E/S/G	1800	Y	Y	2000 x 1680 x 1345

*Electric (E) / Steam (S) / Boiler fed (B)

ENVIROSAVER

OZONE DISINFECTION SYSTEM




402(h) x 500(w) x 260(d)



Envirosaver utilises the very effective and efficient technology of ozone to result in impressive utility cost savings on water, waste, electricity and gas.

Envirosaver disinfects the wash water and everything in it. Because this is achieved in cold water, it results in dramatic utility cost savings. It is for this reason that the application of ozone in laundry has gained rapid international acceptance over conventional laundry methods which require substantial amounts of hot water.

One of the reasons that the uptake on EnviroSaver has been so successful is that it's designed and manufactured by us here in Australia. This has enabled us to make the system modular, meaning that each washer has its own ozone system. Thus making EnviroSaver very price competitive.

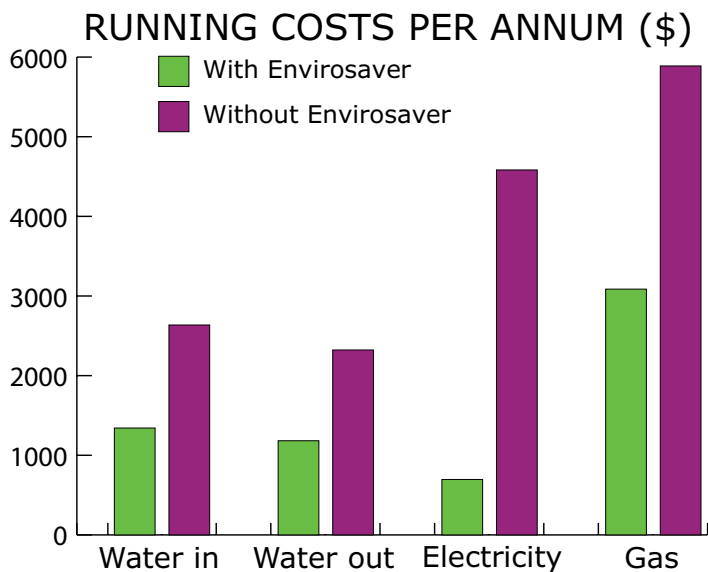

Based on 90 resident facility using 2 washers (16.5kg & 23.4kg)

We have over 220 EnviroSaver systems installed with over 100 groups throughout Australia. When a client chooses us for their ozone solution they have one point of contact for all matters relating to laundry. Whether it is related to ozone or the laundry equipment, we are the one point of contact.

ENVIROSAVER

WATERSAVER



Watersaver is a cleverly designed water reclaiming solution that is packaged within the existing mounting base, installed with the washer. The Watersaver system catches and stores selected rinses in the wash cycle and re-uses them again in other rinses, thus saving a large percentage of water per wash cycle.

The Watersaver does not take up any extra space within your laundry and can be applied to new as well as existing installations.

SOLARIS ECODRY



*ES 50 shown

- Most efficient dryer on the market
- S.A.F.E. - Sensor-Activated Fire Extinguishing system (Standard)
- Residual moisture-control (Standard)
- Double glazed door
- Easy-access lint filter
- Reversing action drum (Standard)
- Fully-programmable (20 cycles)
- Multilingual computer
- Variable height (OH&S Compliant)

MODEL	CAPACITY (KG)	VOLUME DRUM (L)	HEATING*	NET WEIGHT (KG)	GAS HEATING (MJ/H)	DIMENSIONS HxWxD (MM)	MATCHING WASHER (KG)
ES 35	15.88	348	E/S/G	209	57	1700 x 791 x 1027	7.0 - 10.0
ES 3535	(15.88) x 2	(348) x 2	E/S/G	272	(57) x 2	2041 x 791 x 1007	(7.0 - 10.0) x 2
ES 50	22.68	454	E/S/G	276	115	1790 x 972 x 1019	11.0 - 18.0
ES 76	34.02	626	E/S/G	338	137	1791 x 972 x 1268	19.0 - 25.0

*Electric (E) / Steam (S) / Gas (G)

DR SERIES



*DR 35 shown

- C.A.R.E. - Combustion Auto Response Equipped (Optional)
- Residual moisture-control (Optional)
- Programmable (3 cycles)
- Reversing action drum (Optional)
- Available from 11.0kg to 70.4kg capacity

MODEL	CAPACITY (KG)	VOLUME DRUM (L)	HEATING*	NET WEIGHT (KG)	GAS HEATING (MJ/H)	DIMENSIONS HxWxD (MM)	MATCHING WASHER (KG)
DR 25	11	217	E/S/G	137	68	1622 x 711 x 1038	5.5 - 6.5
DR 35	17.5	347	E/S/G	163	95	1622 x 800 x 1191	7.0 - 10.0
DR 335	(15) x 2	(301) x 2	E/S/G	247	77	1937 x 800 x 1090	(7.0 - 10.0) x2
DR 50	26.5	530	E/S/G	247	127	1946 x 981 x 1226	11.0 - 18.0
DR 75	32	634	E/S/G	279	174	1946 x 981 x 1378	19.0 - 25.0
DR 120	51	1021	S/G	624	316	2172 x 1181 x 1651	26.0 - 40.0
DR 170	70.4	1408	S/G	760	417	2388 x 1349 x 1679	41.0 - 55.0

*Electric (E) / Steam (S) / Gas (G)

RI ROLLER IRONER



- Return-feed ironer for pre-dried linen
- Ideal for small volume of linen

*RI 1600/30 shown

MODEL	ROLLER DIAMETER (MM)	ROLLER LENGTH (MM)	HEATING*	OUTPUT (KG/H) / (RH**)	WORKING WIDTH (MM)	NET WEIGHT (KG)	DIMENSIONS HxWxD (MM)
RI 1200/25	250	1200	E	30 / 15%	1150	100	1003 x 1640 x 420
RI 1400/25	259	1400	E	35 / 25%	1350	106	1003 x 1840 x 420
RI 1600/30	300	1600	E	50 / 25%	1550	221	1073 x 2090 x 552
RI 2001/30AV	300	2000	E	60 / 25%	1950	243	1073 x 2490 x 552

*Electric (E)

** Rest humidity

CI FLATWORK IRONER



- Return-feed flatwork ironer
- Iron direct from washer (no need to pre-dry**)
- Ironing belts placed on pressure roller, increasing ironing capacity and quality
- Ideal for medium volume of linen

*CI 3250/500 shown

MODEL	ROLLER DIAMETER (MM)	ROLLER LENGTH (MM)	HEATING*	OUTPUT (KG/H) E/S/G	WORKING WIDTH (MM)	NET WEIGHT (KG)	DIMENSIONS HxWxD (MM)
CI 1650/325	323	1740	E/G	33/-/42.5	1600	645	1140 x 2328 x 886
CI 2050/325	323	2140	E/G	42/-/53.5	2000	735	1140 x 2728 x 886
CI 2050/500	508	2140	E/S/G	76/90/76	2000	900	1160 x 2800 x 1085
CI 2650/500	508	2740	E/S/G	91/117/99	2600	1090	1160 x 3400 x 1085
CI 3250/500	508	3340	E/S/G	106/141/121	3200	1280	1160 x 4000 x 1085

*Electric (E) / Steam (S) / Gas (G)

**Based on 50% (or less) moisture retention

CL CHEST HEATED IRONER



- Return-feed or pass-through
- Iron direct from washer (no need to pre-dry***)
- Feeding and folding optionally available
- Range of working widths available
- Ideal for large volume of linen

*CL 300 shown

MODEL	ROLLER DIAMETER (MM)	WORKING WIDTH (MM)	HEATING*	OUTPUT (KG/H) E/S/G	NET WEIGHT (KG)	DIMENSIONS HxWxD (MM)
CL 300	300	1800	E	30/-/30	250	1150 x 2255 x 815
CL 370	370	1750**	E/S/G	48/-/48****	700	1200 x 2474 x 1170
CL 500	500	1750**	E/S/G	65/60/65****	1000	1200 x 2600 x 1195
CL 600	600	1750**	E/S/G	100/109/100****	1800	1395 x 2725 x 1900
CL 800	800	1750**	E/S/G	152/186/152****	2000	1415 x 2910 x 2035

*Electric (E) / Steam (S) / Gas (G)

**Also available with 2000/2200/2500/3000/3300mm working width

***Based on 50% (or less) moisture retention

****Based on 1750mm working width and 50% residual moisture

CFFS CHEST HEATED IRONER



- Integrated feeder, folder, cross-folder and stacker
- Capable of single-user operation
- Batch-control capability
- Iron direct from washer (no need to pre-dry***)
- Range of working widths available
- Ideal for large volume of linen

*CFFS500 shown

MODEL	ROLLER DIAMETER (MM)	WORKING WIDTH (MM)	HEATING*	AVERAGE OUTPUT (KG/H)****	NET WEIGHT (KG)	DIMENSIONS HxWxD (MM)
CFFS 500	500	2000**	E/S/G	75	1560	1430 x 3830 x 2155

*Electric (E) / Steam (S) / Gas (G)

** Also available with 2500/3000/3300mm working width

***Based on 50% (or less) moisture retention

****Based on 2000mm working width and 50% residual moisture

CW8 COMMERCIAL WASHER



- Freestanding
- Ideal where space is at a premium but wash quality is paramount
- 6 wash programs
- User-friendly control panel
- Program modifications available for optimum results
- Mounting base available to comply with OH&S requirements
- Coin-operation available

MODEL	CAPACITY (KG)	VOLUME DRUM (L)	OPTIONAL COIN OPERATION	EXTRACTION (RPM)	HEATING*	NET WEIGHT (KG)	DIMENSIONS HxWxD (MM)
CW8	8	80	Y	1000	N/E	120	1092 x 683 x 711

* No Heating (N) / Electric (E) / Gas (G)

CD8 COMMERCIAL DRYER



- Companion dryer to CW8 washer
- 5 drying programs
- Easily removable lint filter
- User-friendly control panel
- Mounting base available to comply with OH&S requirements
- Coin-operation available

MODEL	CAPACITY (KG)	VOLUME DRUM (L)	OPTIONAL COIN OPERATION	EXTRACTION (RPM)	HEATING*	NET WEIGHT (KG)	DIMENSIONS HxWxD (MM)
CD8	8	201	Y	-	E/G	68	1077 x 683 x 711

* No Heating (N) / Electric (E) / Gas (G)

CS8 WASHER/DRYER COMBINATION



- Freestanding soft mount: can be installed on any floor type
- Small footprint for space-saving
- 6 wash programs and 5 drying programs
- Viewing window for both washer and dryer
- Coin-operation available

MODEL	CAPACITY (KG)	VOLUME DRUM (L)	OPTIONAL COIN OPERATION	EXTRACTION (RPM)	HEATING*	NET WEIGHT (KG)	DIMENSIONS HxWxD (MM)
CS8	8	80/201	Y	1000/-	E/G	168	1905 x 683 x 711

* Electric (E) / Gas (G)

OXYFRESH

AIR SANITISATION

Oxyfresh air sanitisation systems can be used in a variety of industries.

Used extensively in hospitality, Oxyfresh can be used to sanitise and remove odours from smoke/water damaged hotel and motel rooms, and to destroy potentially harmful bacteria within restaurants, kitchens and aged-care facilities.

The Oxyfresh series of room sanitisers are available in the powerful Oxyfresh Pro for maximum disinfection, and the compact Oxyfresh Cube for constant air purification in high traffic areas.

OXYFRESH

OXYFRESH PRO



- Stainless steel construction
- Quick and easy to operate
- Dual-lamp for maximum cleaning strength
- Countdown timer with up to 2.5 hours of automatic operation
- Ideal for hotels, motels and high-volume areas
- 210(h) x 385(w) x 205(d)

An environmentally-friendly, chemical free, high-tech housekeeping aid for busy hospitality providers. Modern and stylish in design, the Oxyfresh Pro features all stainless steel construction with microcomputer technology and is the ideal ozone unit for any hotel, motel or function centre.

OXYFRESH CUBE



- Stylishly designed cube-shaped cabinet
- Quick and easy to operate
- Countdown timer with up to 5 hours of automatic operation
- On-Off sequence timer control
- Electronic adjustment of output and time
- 149(h) x 125(w) x 137(d)

Designed for areas where constant air purification is required, the Oxyfresh Cube features an "on-off" timer to ensure appropriate levels of ozone are being distributed consistently at regular intervals. Thus making it ideal for reception areas, restaurants and mobile homes.



**Bag not included
(see page 19)*

SINGLE

- Foot-operated lids (OH&S Safe)
- Large polyurethane wheels
- Colour-coded Lids
- Choice of white epoxy coating, or chrome
- Choice of yellow, red, blue, green or white lids
- 880(h) x 500(w)x 535(d)



**Bags not included
(see page 19)*

DOUBLE

- Foot-operated lids (OH&S Safe)
- Large polyurethane wheels
- Colour-coded Lids
- Choice of white epoxy coating, or chrome
- Choice of yellow, red, blue, green or white lids
- 880(h) x 890(w) x 535(d)



**Bags not included
(see page 19)*

TRIPLE

- Foot-operated lids (OH&S Safe)
- Large polyurethane wheels
- Colour-coded Lids
- Choice of white epoxy coating, or chrome
- Choice of yellow, red, blue, green or white lids
- 880(h) x 1290(w) x 535(d)



**Lids not included*

TROLLEY BAGS

- Ziploc® Drawstring
- High tensile strength material
- Available in Red, White, Green, Yellow & Blue




BAG SLING

- Stops collection bags from overfilling
- Adjustable Height
- Easy to use velcro design
- Can be applied to LSA and most other collection trolleys
- Keeps bag weight manageable



SIDE BIN

- Comes with bracket and bin
- Installed in seconds
- Lightweight & solid frame
- Can be applied to LSA and most other collection trolleys
- Spring loaded lockable lid

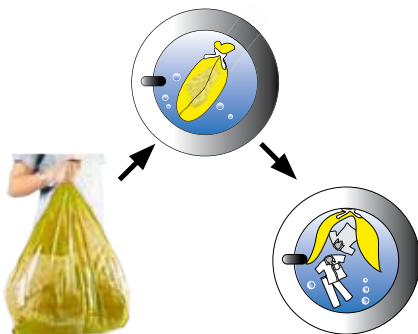

SOLUSEAM

- For use when cleaning "foul" laundry
- Sits inside regular trolley bag
- Soluble seam opens in wash, releasing garments
- No need to handle heavily soiled laundry



All trolleys featured in this section are proudly Australian made and owned



PERSONAL

- Distribution of clean clothing
- Caters for up to 30 Residents (Double-sided), with name tags
- Large polyurethane wheels
- Sliding Baskets for easy access
- Side Hanging Rails
- Cover available
- 1425(h) x 985(w) x 545(d)



LINEN

- Distribution of clean Linen and Towels
- Large polyurethane wheels
- Side Hanging Rails
- Rolls straight into linen closets
- Alleviates double handling
- Cover available
- 1425(h) x 985(w) x 545(d)



RISING-BASE

- Safe transport and storage of full linen bags
- Spring-loaded rising base (OH&S Safe) with stainless steel hooks
- Large polyurethane wheels
- Ergonomic Height
- Light-weight & durable Plastic Moulded Body
- Cover available
- 350 Litre
- 790(h) x 700(w) x 1000(l)



GARMENT RACK

- For transport and storage of hangable clothing
- Hang clothes straight from dryer
- Lightweight & Durable
- 6 height adjustments
- Polyurethane wheels
- 1405-1905(h) x 750(w) x 1335(l)



FOLDING TABLE

- For transferring from washer to dryer
- Mobile folding table
- Easy storage under fixed bench
- Optimal OH&S height
- Large polyurethane wheels
- Large PVC top
- Raised edges for load stability
- 850(h) x 640(w) x 1170(l)



*All trolleys featured in
this section are proudly
Australian made and owned*

LABELLING SYSTEM

The loss of clothing and personal items is a common and frustrating occurrence within any large facility. Laundry Solutions Australia recognises this, offering a variety of clothing and personal property identification options to suit any facility.

The labels are printed by Laundry Solutions Australia with a special waterproof, non fade ink and sent out to your facility via post, usually within 24 hours of receipt of the order.

You can elect to receive the heat sealer for your exclusive use, free of charge including maintenance. This is by far the most popular option within the industry because the facility does not need to outlay any cost for the heat seal machine, they just start labelling their resident's clothing. There is no time based lock-in contract just a label supply agreement committing to purchase your labels exclusively with us.

Laundry Solutions Australia also offers a "Rent/Buy" option, as well as an option to purchase the heat sealer outright. Please contact a consultant for more information about these options.

KEN STANFORD
1800 243 477

ROOM 12A
JESSICA RAFFERTY

PROPERTY OF
GLADYS MAGUIRE

DAVID ARMITAGE

JOHN SMITH
ABC AGED CARE



DONNA HOPPER
ROOM 12A

HEAT SEALER



- Can be provided at no cost in exchange for ongoing label orders
- Ergonomic lever for comfort (OH&S)
- CE Safety Approved
- Lightweight for ease of transportation
- Simple electronic controls with digital display
- Interchangeable heat-seal plates
- Upper plate: 150(w) x 115(d)
- Unit size: 500(h) x 220(w) x 450(l)

LABELS

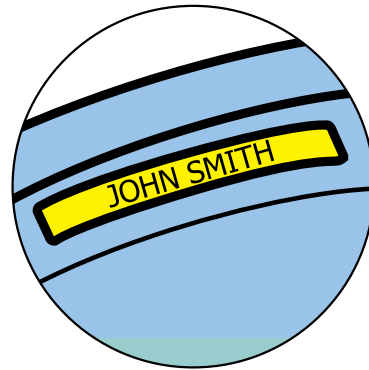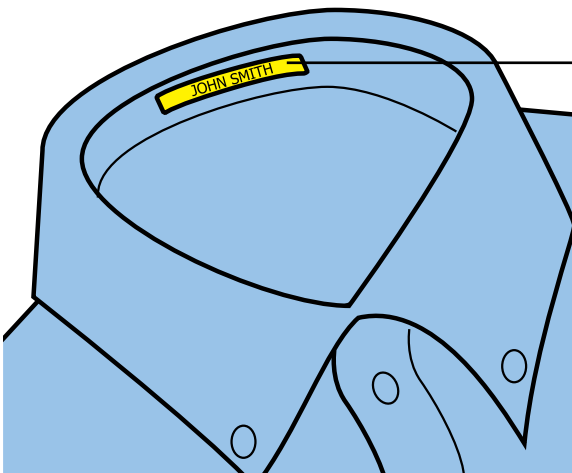

- New soft label design eliminates skin irritation
- Adhesive backing allows labels to be used for personal items (books, photo frames etc)
- Guaranteed to stay on and not fade for the life of the garment
- Labels posted back to you usually within 24 hours of receipt of your order
- Longer labels to accommodate any name
- Applied in approximately 13 seconds
- Size (mm): 65(w) x 10(h)

WF SLUICE WASHER

		WF 65	WF 75	WF 100	WF 135	WF 165	WF 185	WF 235	WF 305	WF 400
Capacity (kg)		6.5	7.3	9.5	13.2	16.5	18.1	23.4	30.5	40
Dimensions	Height (mm)	1014	1014	1014	1175	1175	1175	1175	1351	1386
	Width (mm)	660	660	660	780	780	780	780	860	990
	Depth (mm)	670	670	770	760	860	950	1010	1140	1300
Power Electric heat	Amps	20	20	20	32	32	32	50	50	70
	Volts	415	415	415	415	415	415	415	415	415
Power Steam heat	Amps	10	10	10	10	10	10	10	10	10
	Volts	240	240	240	240	240	240	240	240	240
Power No heat	Amps	10	10	10	10	10	10	10	10	10
	Volts	240	240	240	240	240	240	240	240	240
Water in (washer taps)		2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot
Diameter drain (mm)		50	50	50	50	50	50	75	75	75



HC FREESTANDING (HIGH-SPIN)

		HC 60	HC 65	HC 75	HC 100	HC 135	HC 165
Capacity (kg)		6.0	6.5	7.5	10.0	13.5	16.5
Dimensions	Height (mm)	1038	1038	1038	1038	1202	1202
	Width (mm)	660	660	660	660	780	780
	Depth (mm)	622	727	727	827	813	916
Power Electric heat	Amps	15	15	20	20	32	32
	Volts	240	240	415	415	415	415
Power Steam heat	Amps	10	10	10	10	10	10
	Volts	240	240	240	240	240	240
Power No heat	Amps	10	10	10	10	10	10
	Volts	240	240	240	240	240	240
Water in (washer taps)		2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot
Diameter drain (mm)		50	50	50	50	50	50



HF SOFT-MOUNT (HIGH-SPIN)

		HF 150	HF 185	HF 234	HF 304	HF 455	HF 575	HF 730	HF 900
Capacity (kg)		15.0	18.5	23.4	30.4	45.5	57.5	73.0	90.0
Dimensions	Height (mm)	1348	1348	1500	1530	1920	1920	2100	2100
	Width (mm)	780	780	900	1060	1200	1200	1300	1300
	Depth (mm)	753	853	985	985	1335	1500	1620	1800
Power Electric heat	Amps	40	40	50	50	80	80	80	80
	Volts	415	415	415	415	415	415	415	415
Power Steam heat	Amps	10	10	10	10	20	20	20	20
	Volts	240	240	240	415	415	415	415	415
Power No heat	Amps	10	10	10	10	20	20	20	20
	Volts	240	240	240	415	415	415	415	415
Water in (washer taps)		2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot
Diameter drain (mm)		50	50	75	75	75	75	75	75



HM BARRIER WASHER

		HM 160	HM 220	HM 270	HM 330	HM 490	HM 670	HM 900
Capacity (kg)		16.0	22.0	27.0	33.0	49.0	67.0	90.0
Dimensions	Height (mm)	1385	1385	1665	1665	1665	1690	2000
	Width (mm)	980	1180	1172	1292	1612	1965	1680
	Depth (mm)	910	910	1053	1053	1053	1053	1345
Power Electric heat	Amps	32	32	32	50	60	80	-
	Volts	415	415	415	415	415	415	-
Power Steam heat	Amps	10	10	10	20	20	20	30
	Volts	415	415	415	415	415	415	415
Power No heat	Amps	10	10	10	20	20	20	30
	Volts	415	415	415	415	415	415	415
Water in (washer taps)		2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot	2 cold 1 hot
Diameter drain (mm)		50	50	75	75	75	75	75



CW8 COMMERCIAL WASHER

Capacity (kg)		8
Dimensions	Height (mm)	1092
	Width (mm)	683
	Depth (mm)	711
Power circuit	240V	10A
Water in (washer taps)		1 cold 1 hot
Diameter drain (mm)		30



SOLARIS ECODRY

		ES 35	ES 3535	ES 50	ES 76
Capacity (kg)		15.88	(15.88) x 2	22.68	34.02
Dimensions	Height (mm)	1700	2041	1790	1791
	Width (mm)	791	791	972	972
	Depth (mm)	1027	1007	1019	1265
Power Steam heat	Amps	10	10	10	10
	Volts	240	240	240	240
Power Gas heat	Amps	10	10	10	10
	Volts	240	240	240	240
Gas (Mj)		57	(57) x 2	95	116
Exhaust diameter (mm)		150	(150) x 2	200	200

DR SERIES

		DR 25	DR 35	DR 335	DR 50	DR 75	DR 120	DR 170
Capacity (kg)		11	17.5	(15) x 2	26.5	32	51	70.4
Dimensions	Height (mm)	1622	1622	1937	1946	1946	2172	2388
	Width (mm)	711	800	800	981	981	1181	1349
	Depth (mm)	1038	1191	1090	1226	1346	1651	1679
Power Steam heat	Amps	10	10	10	10	10	20	20
	Volts	240	240	240	240	240	415	415
Power Gas heat	Amps	10	10	10	10	10	20	20
	Volts	240	240	240	240	240	415	415
Gas (Mj)		68	95	77	127	174	316	417
Exhaust diameter (mm)		152	203	203	203	203	254	305



DRYER SPECIFICATIONS

CD8 COMMERCIAL DRYER

Capacity (kg)		8
Dimensions	Height (mm)	1077
	Width (mm)	683
	Depth (mm)	711
Power circuit	240V	10A
Heating	Gas (Mj)	25
	Electric (240V)	25A
Exhaust diameter (mm)		102



CS8 WASHER/DRYER COMBINATION

		Washer	Dryer
Capacity (kg)		8	8
Dimensions	Height (mm)		1905
	Width (mm)		683
	Depth (mm)		711
Power circuit	240V	10A	10A
Heating	240V: 1-Phase	-	20A
	415V: 3-Phase	10A	10A
Water in (washer taps)		1 cold 1 hot	-
Diameter drain (mm)		30	-
Exhaust diameter (mm)		-	102



www.yourlaundry.com.au
info@yourlaundry.com.au

Head Office

1/6 Redland Drive,
MITCHAM, VIC 3132
Australia
P: 1800 243 477
F: 1300 728 108

QLD Office

20/30 Mudgeeraba Rd,
MUDGEERABA, QLD 4213
Australia
P: 1300 666 289
F: 1300 728 108

