




IPSO Washer HF455 Specification Sheet

Capacity	45.5kg (Dry)
Electrical	80 amp – 415 Volt – 3-phase at 1.8m off Floor
EnviroSaver	Standard 10amp GPO at 1.8m off Floor (Where Applicable)
Water	
Cold	2 x Standard ¾" Cold Washing Machine Water Taps at 1.6m off Floor
Hot	1 x Standard ¾" Hot Washing Machine Water Tap at 1.6m off Floor
Water Pressure	Minimum = 44PSI (3 Bar), Maximum = 72PSI (5 Bar)
Drain	75mm Dia Through-Floor Waist
Foundations	Minimum 100mm M20 Grade Concrete Foundation

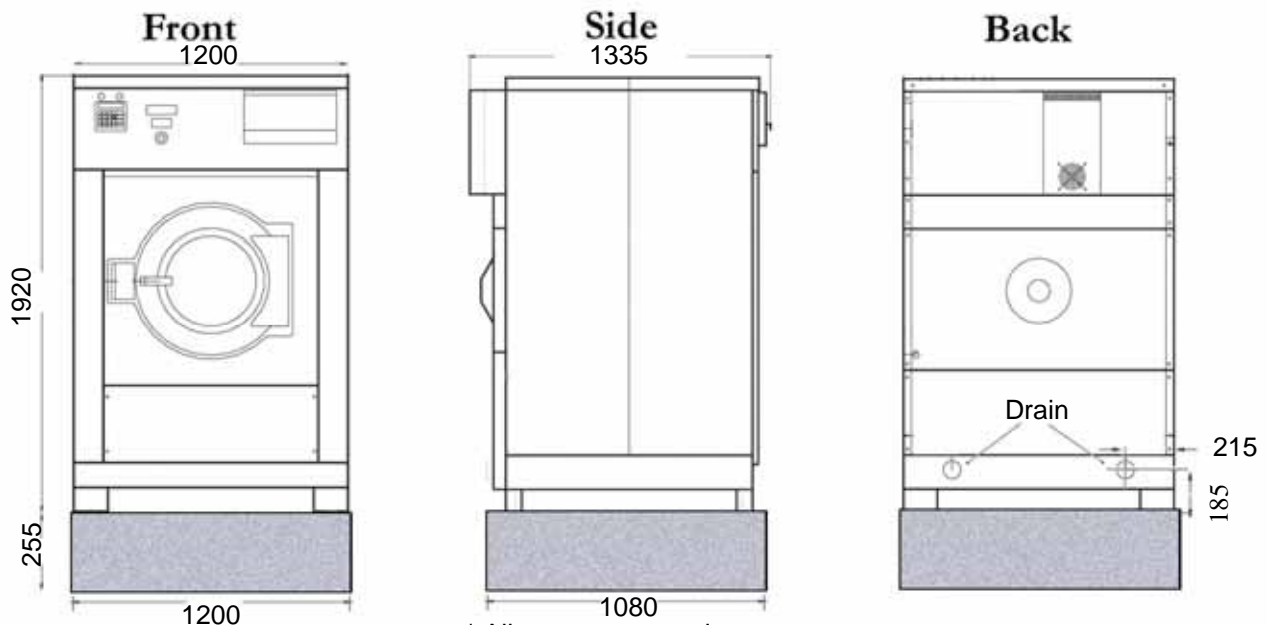


www.yourlaundry.com.au



IPSO Washer HF575 Specification Sheet

Capacity	57.5kg (Dry)
Electrical	80 amp – 415 Volt – 3-phase at 1.8m off Floor
EnviroSaver	Standard 10amp GPO at 1.8m off Floor (Where Applicable)
Water	
Cold	2 x Standard ¾" Cold Washing Machine Water Taps at 1.6m off Floor
Hot	1 x Standard ¾" Hot Washing Machine Water Tap at 1.6m off Floor
Water Pressure	Minimum = 44PSI (3 Bar), Maximum = 72PSI (5 Bar)
Drain	75mm Dia Through-Floor Waist
Foundations	Minimum 100mm M20 Grade Concrete Foundation

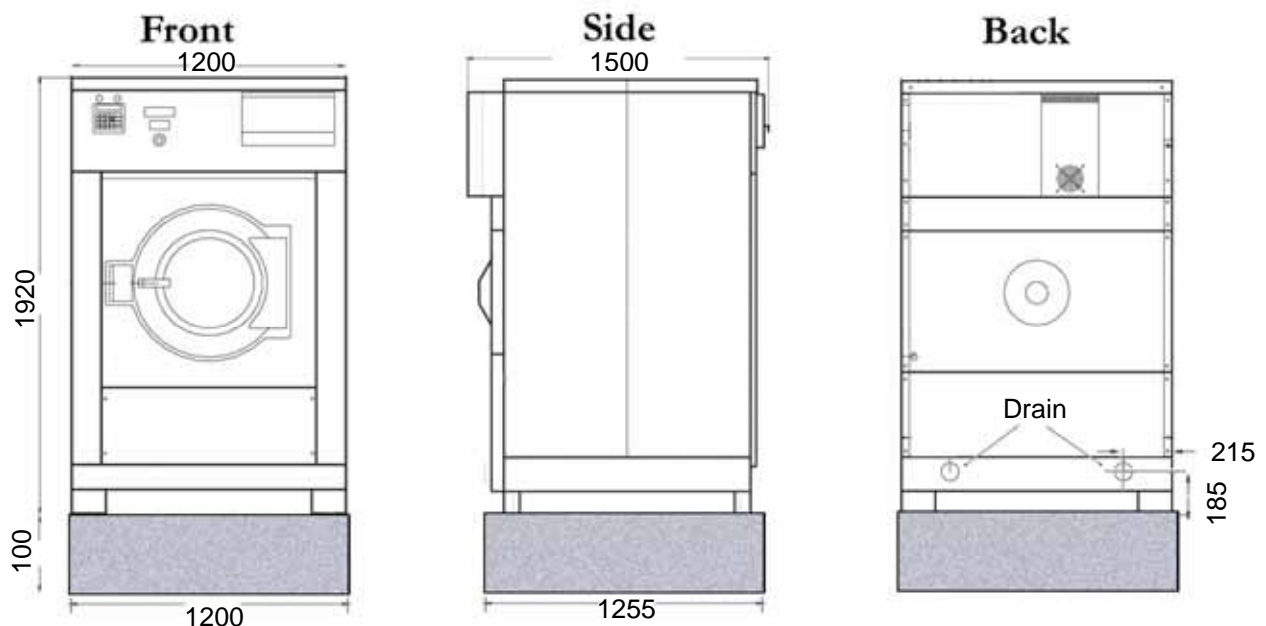


* All measurements in mm

www.yourlaundry.com.au



IPSO Washer HF730 Specification Sheet

Capacity	73kg (Dry)
Electrical	80 amp – 415 Volt – 3-phase at 1.8m off Floor
EnviroSaver	Standard 10amp GPO at 1.8m off Floor (Where Applicable)
Water	
Cold	2 x Standard ¾" Cold Washing Machine Water Taps at 1.6m off Floor
Hot	1 x Standard ¾" Hot Washing Machine Water Tap at 1.6m off Floor
Water Pressure	Minimum = 44PSI (3 Bar), Maximum = 72PSI (5 Bar)
Drain	102mm Dia Through-Floor Waist
Foundations	Minimum 100mm M20 Grade Concrete Foundation

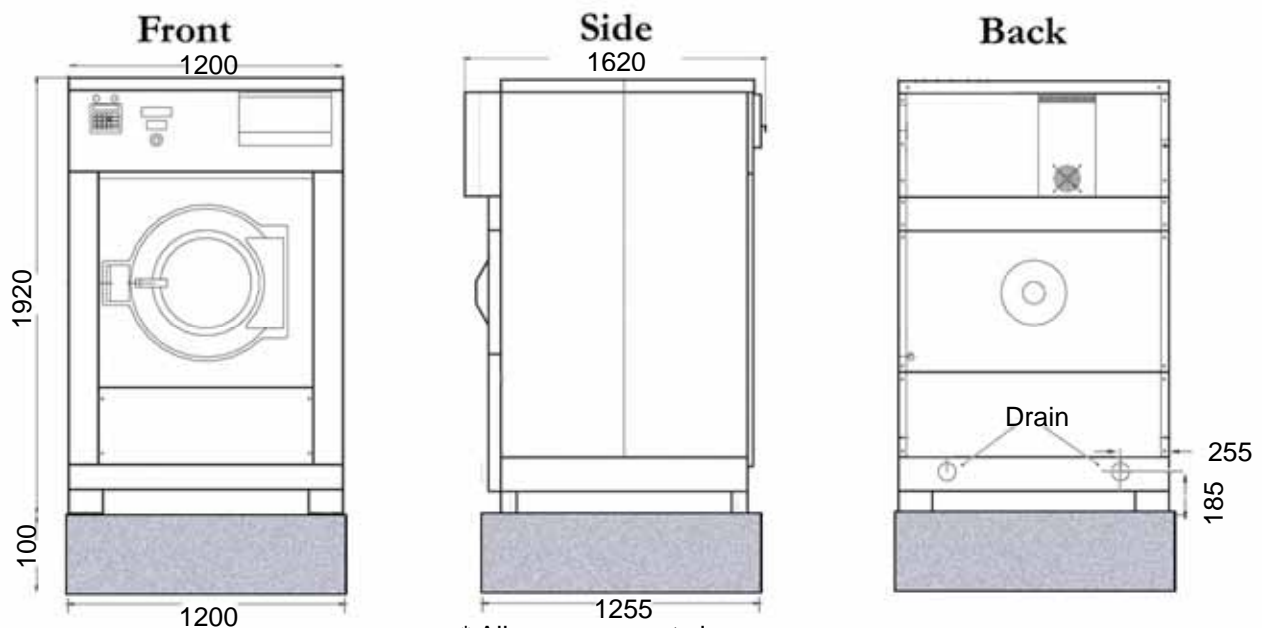

* All measurements in mm

www.yourlaundry.com.au