




## IPSO Washer HC60 Specification Sheet

<b>Capacity</b>	5.5kg (Dry)
<b>Electrical</b>	15amp – 240 Volt – Single Phase at 1.8m off Floor
EnviroSaver	Standard 10amp GPO at 1.8m off Floor (Where Applicable)
<b>Water</b>	
Cold	2 x Standard ¾" Cold Washing Machine Water Taps at 1.6m off Floor
Hot	1 x Standard ¾" Hot Washing Machine Water Tap at 1.6m off Floor
Water Pressure	Minimum = 44PSI (3 Bar), Maximum = 72PSI (5 Bar)
<b>Drain</b>	75mm Dia Through-Floor Waist
<b>Foundations</b>	Minimum 100mm M20 Grade Concrete Foundation

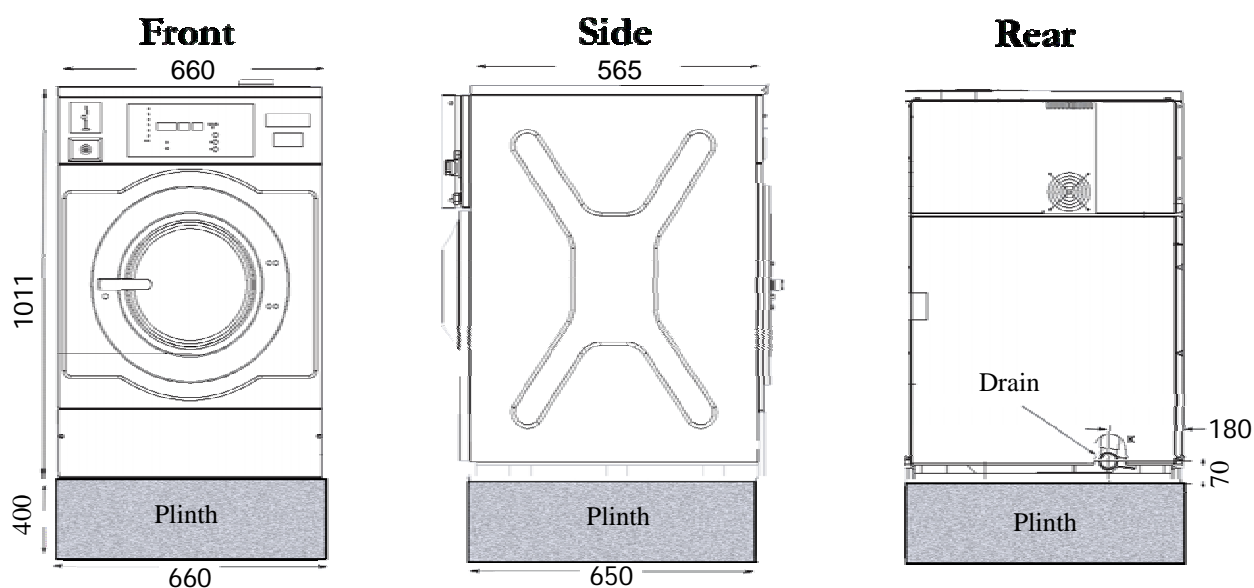


\* All measurements in mm

[www.yourlaundry.com.au](http://www.yourlaundry.com.au)



## IPSO Washer HC100 Specification Sheet

<b>Capacity</b>	9.5kg (Dry)
<b>Electrical</b>	20 amp – 415 volts – 3 phase at 1.8m off Floor
EnviroSaver	Standard 10amp GPO at 1.8m off Floor (Where Applicable)
<b>Water</b>	
Cold	2 x Standard ¾" Cold Washing Machine Water Taps at 1.6m off Floor
Hot	1 x Standard ¾" Hot Washing Machine Water Tap at 1.6m off Floor
Water Pressure	Minimum = 44PSI (3 Bar), Maximum = 72PSI (5 Bar)
<b>Drain</b>	75mm Dia Through-Floor Waist
<b>Foundations</b>	Minimum 100mm M20 Grade Concrete Foundation

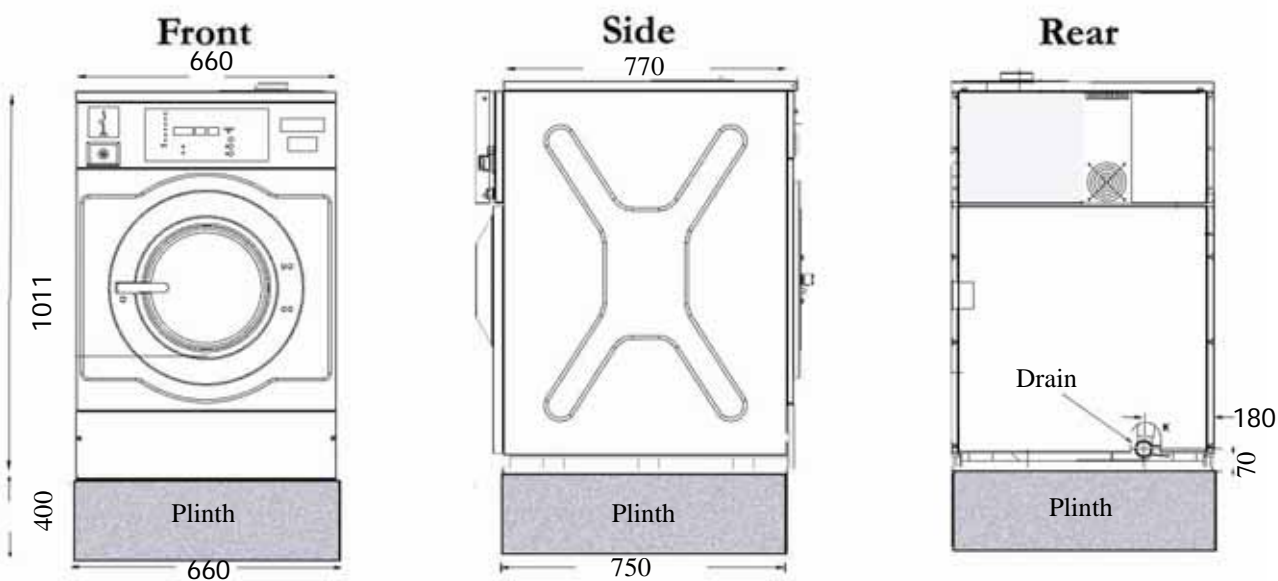


\* All measurements in mm

[www.yourlaundry.com.au](http://www.yourlaundry.com.au)



## IPSO Washer HC165 Specification Sheet

<b>Capacity</b>	16.5kg (Dry)
<b>Electrical</b>	40amp – 415 volt – 3 - phase at 1.8m off Floor
EnviroSaver	Standard 10amp GPO at 1.8m off Floor (Where Applicable)
<b>Water</b>	
Cold	2 x Standard ¾" Cold Washing Machine Water Taps at 1.6m off Floor
Hot	1 x Standard ¾" Hot Washing Machine Water Tap at 1.6m off Floor
Water Pressure	Minimum = 44PSI (3 Bar), Maximum = 72PSI (5 Bar)
<b>Drain</b>	75mm Dia Through-Floor Waist
<b>Foundations</b>	Minimum 100mm M20 Grade Concrete Foundation

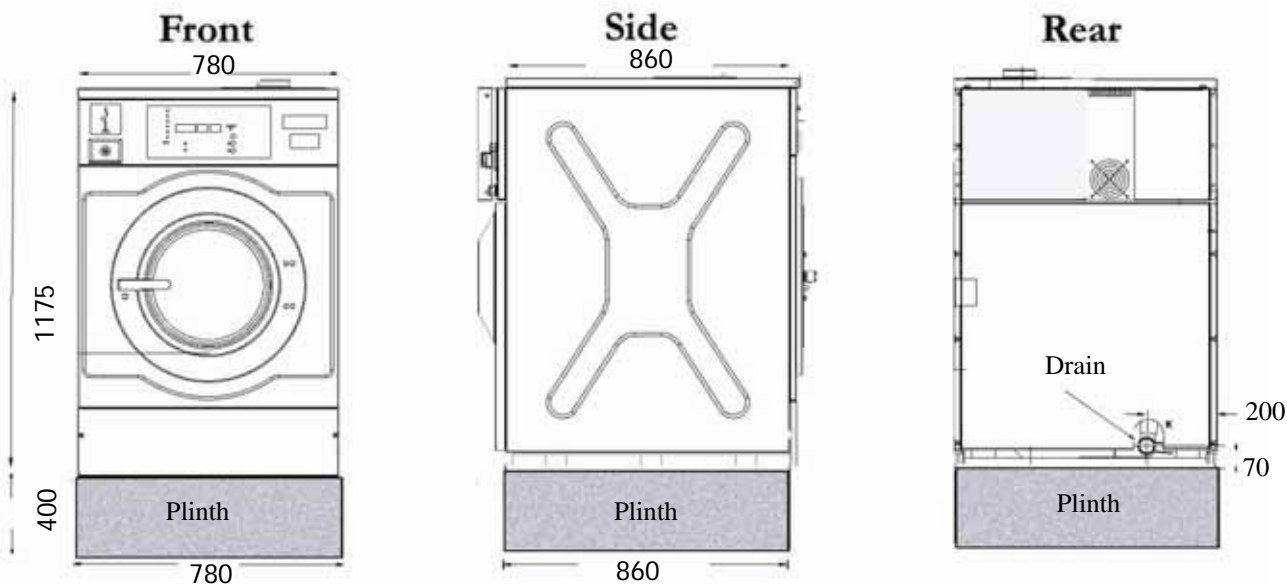

\* All measurements in mm

[www.yourlaundry.com.au](http://www.yourlaundry.com.au)