

PROFESSIONAL LAUNDRY EQUIPMENT

HM 270
HM 330
HM 490
HM 670






HM 270 - HM 330 - HM 490 - HM 670

Efficient soap box

- powder and liquid
- number of compartments: 4

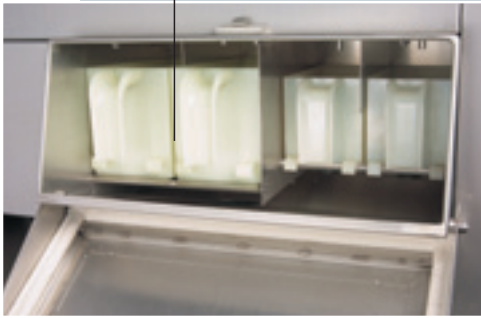

Big door opening

- easy loading and unloading
- automatic positioning through the PS40



Stainless steel cabinet

full range:

- HM 270: 27 kg
- HM 330: 33 kg
- HM 490: 49 kg
- HM 670: 67 kg




Inverter drive

- wash and spin speeds freely programmable
- low noise level
- high G-forces
- up to 900 rpm
- cast iron pulleys

IPSO: G-DRIVING THE INDUSTRY

Easy service

- easy access to service intensive components
- fault detection on PS40

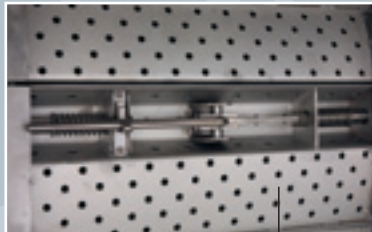

Safety

- electrical door lock mechanism
- according to EC-regulations

Pass-through concept

- opposed doors: soiled room / clean room
- no contact between disinfected laundry and contaminated linen
- available in:
 - electric heating
 - steam heating
 - gas heating



PS40 microprocessor

- freely programmable
- 4 standard programmes
- possibility to compose 40 programmes
- temperature freely programmable
- water level freely programmable
- infra red port: easy downloading of programmes from a laptop
- up to 12 soap pumps centrally controlled by PS40



TECHNICAL SPECIFICATIONS HM 270-330-490-670

		HM 270	HM 330	HM 490	HM 670				
Cylinder:	Capacity 1/10 (kg)	27	33	49	67				
	Volume (L)	270	330	490	670				
	Diameter (mm)	800	800	800	800				
	Depth (mm)	534	654	974	1347				
Door opening diam (mm)		450 x 310	450 x 310	450 x 310	450 x 310				
Loading height (mm)		750	750	750	750				
Speed:	Spin (rpm)	900	900	900	900				
	Wash (rpm)	45	45	45	45				
G-factor		362	362	362	362				
Motor power (kW)		4.0	4.0	5.5	5.5				
Heating	Steam (kg/h)	18	26	40	60				
	Electric (kW)	18	27	36	45				
	Gas (kW)	25	25	25	25				
Soapbox compartments		4	4	4	4				
Split pocket (2 compartments)		-	-	-	2				
Water connection	cold (")	3/4	3/4	3/4	1				
	hot (")	3/4	3/4	3/4	1				
	soft (option) (")	3/4	3/4	3/4	1				
Drain valve (")		3	3	3	3				
Weight	Net (kg)	880	1060	1300	1570				
	Gross (kg)	1100	1160	1520	1800				
Dimensions	Height (mm)	1665	1665	1665	1690				
	Width (mm)	1172	1292	1612	1965				
	Depth (mm)	1053	1053	1053	1053				
Packing dimensions	Height (mm)	1970	1970	1970	1970				
	Width (mm)	1500	1620	1940	2290				
	Depth (mm)	1350	1350	1350	1350				
	Volume (m³)	3.99	4.31	5.16	6.09				
Type of heating		POWER SUPPLY – FUSES							
		230V 3AC	400V tri + N	230V 3AC	400V tri+ N	230V 3AC	400V tri+ N	230V 3AC	400V tri + N
Electrical		63 A	40 A	100 A	50 A	125 A	63 A	160 A	80 A
Gas		16 A	16 A	16 A	16 A	16 A	16 A	16 A	16 A
Steam		16 A	16 A	16 A	16 A	16 A	16 A	16 A	16 A

All specifications subject to change without notice



IPSO-LSG NV, NIEUWSTRAAT 146, B-8560 WEVELGEM (BELGIUM) TEL +32 56/41 20 54 - FAX +32 56/41 86 74

info@ipso.be - WWW.IPSO.BE



IPSO
- the commercial laundry division in
LSG, Laundry Systems Group